



Functional Devices, Inc.
 310 South Union Street
 Russiaville, IN 46979
 www.functionaldevices.com

Office: (765) 883-5538
 Sales: (800) 888-5538
 Fax: (765) 883-7505
 Email: sales@functionaldevices.com

Manufacturing quality products in the United States of America since 1969

PSM24A24DAS

4.00" & 2.75" Track Mount Isolated DC Power Supply, 24 Vac to 1.5-28 Vdc, 300 mA Adjustable Output



Functional Devices, Inc. A600C 2005



Output Current Ratings:

116 mA @ 10 Vdc
 125 mA @ 12 Vdc
 300 mA @ 24 Vdc

Input Current Rating:


950 mA Maximum

Percent Ripple:

0.0016%, 24 Vdc @ 300 mA

Regulation:

Load: 0.04% No Load to Full Load
 Line: 0.0080 mV/V

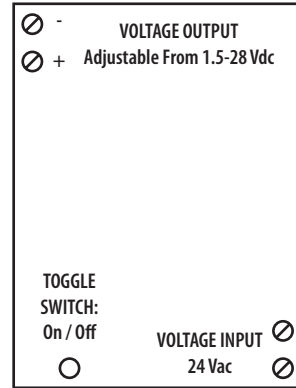

Voltage Input: 24 Vac; 50-60 Hz
Voltage Output: 1.5 - 28 Vdc Isolated
Overload Protection: Electrical and Thermal
Operating Temperature: -30 to 140° F
Status: LED On = Activated
Dimensions: 1.625" x 2.750" x 4.000"
Track Mount: 4.000" and 2.750"
 MT212-4 Mounting Track Supplied
Weight: 1.10 lbs.
ON/OFF Switch: 2 Position Toggle
Approvals: Class II UL Listed, UL916, C-UL Canada
 CE Approved

Notes: