

RIB02P

Enclosed Relay 20 Amp DPDT with 208-277 Vac Coil



Functional Devices, Inc. A600C 2005



Contact Ratings:

20 Amp Resistive @ 300 Vac
20 Amp Resistive @ 28 Vdc
20 Amp Ballast @ 277-480 Vac
15 Amp Resistive @ 600 Vac
770 VA Pilot Duty @ 120 Vac
1158 VA Pilot Duty @ 240 Vac
1110 VA Pilot Duty @ 277 Vac
1640 VA Pilot Duty @ 480 Vac
3 HP @ 480-600 Vac
2 HP @ 240-277 Vac
1 HP @ 120 Vac


Coil Current:

95 mA @ 208-277 Vac

Coil Voltage Input:

208-277 Vac/dc; 50-60 Hz
Drop Out = 60 Vac
Pull In = 160 Vac

Relays & Contact Type: One (1) DPDT Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 18mS
Relay Status: LED On = Activated
Dimensions: 4.00" x 4.00" x 1.80" with .50" NPT Nipple
Wires: 16', 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL Canada
California State Fire Marshal, CE Approved
Housing Rating: Plenum, NEMA 1
Gold Flash: Yes
Override Switch: No

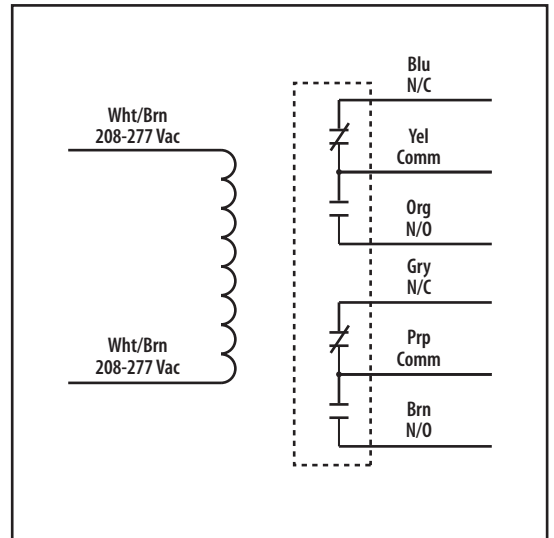

Notes: