

RIBM24S

4.00" Track Mount Relay 15 Amp SPST + Override with 24 Vac/dc Coil



Functional Devices, Inc. A600C 2005



Contact Ratings:

15 Amp General Use @ 125 Vac
10 Amp General Use @ 250 Vac
10 Amp Resistive @ 30 Vdc
1/2 HP @ 125-250 Vac
470 VA Pilot Duty @ 120-240 Vac

Coil Current:

24 mA @ 20 Vac	13 mA @ 20 Vdc
28 mA @ 24 Vac	16 mA @ 24 Vdc
44 mA @ 35 Vac	25 mA @ 35 Vdc


Coil Voltage Input:

24 Vac/dc; 50-60 Hz
Drop Out = 3 Vac / 3.8 Vdc
Pull In = 20 Vac / 20 Vdc

Notes:

» Must cut appropriate jumper to select Normally Open or Normally Closed

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 6mS
Relay Status: LED On = Activated
Dimensions: 1.250" x 4.000" x 1.750"
Track Mount: 4.000"; See MT4 Series on page 128
MT4 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL Canada
California State Fire Marshal, CE Approved
Gold Flash: No
Override Switch: Yes

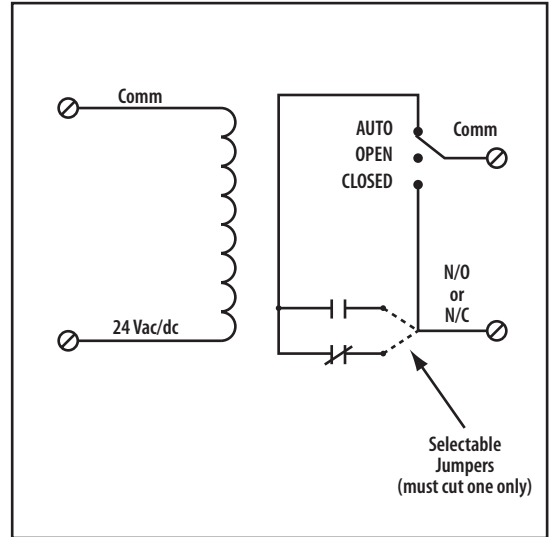

Notes: