




Functional Devices, Inc.
 310 South Union Street
 Russiaville, IN 46979
 www.functionaldevices.com

Office: (765) 883-5538
 Sales: (800) 888-5538
 Fax: (765) 883-7505
 Email: sales@functionaldevices.com

Manufacturing quality products in the United States of America since 1969

RIBMN12S

2.75" Track Mount Relay 15 Amp SPDT with 12 Vac/dc Coil



Functional Devices, Inc. A600C 2005



Contact Ratings:

15 Amp General Use @ 125 Vac
 12 Amp General Use @ 277 Vac
 10 Amp Resistive @ 30 Vdc N/O
 7 Amp Resistive @ 30 Vdc N/C
 1/2 HP @ 125 Vac
 1 HP @ 250 Vac
 1/4 HP @ 277 Vac
 C300 Pilot Duty

Coil Current:

48 mA @ 10 Vac
 56 mA @ 12 Vac
 26 mA @ 11 Vdc
 32 mA @ 12 Vdc


Coil Voltage Input:

12 Vac/dc ; 50-60 Hz
 Drop Out = 2 Vac / 2.5 Vdc
 Pull In = 9 Vac / 11 Vdc

Notes:

» Must cut appropriate jumper to select Normally Open or Normally Closed

Relays & Contact Type: One (1) SPST Continuous Duty Coil
Expected Relay Life: 10 million cycles minimum mechanical
Operating Temperature: -30 to 140° F
Operate Time: 6mS
Relay Status: LED On = Activated
Dimensions: 1.250" x 2.750" x 1.750"
Track Mount: 2.750", See MT212 Series on page 127
 MT212 Mounting Track Sold Separately
Approvals: UL Listed, UL916, UL864, C-UL Canada
 California State Fire Marshal, CE Approved
Gold Flash: No
Override Switch: Yes

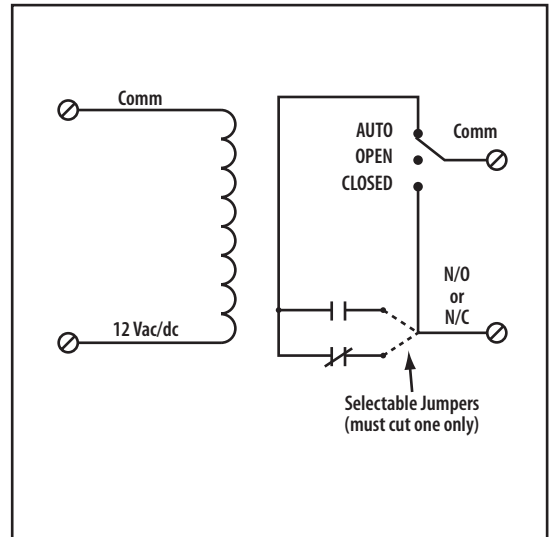

Notes: