




Functional Devices, Inc.  
 310 South Union Street  
 Russiaville, IN 46979  
 www.functionaldevices.com

Office: (765) 883-5538  
 Sales: (800) 888-5538  
 Fax: (765) 883-7505  
 Email: sales@functionaldevices.com

Manufacturing quality products in the United States of America since 1969

## RIBMN24S

### 2.75" Track Mount Relay 15 Amp SPDT with 24 Vac/dc Coil



Functional Devices, Inc. A600C 2005



#### Contact Ratings:

15 Amp General Use @ 125 Vac  
 10 Amp General Use @ 250 Vac  
 10 Amp Resistive @ 30 Vdc  
 1/2 HP @ 125-250 Vac  
 470 VA Pilot Duty @ 120-240 Vac

#### Coil Current:

24 mA @ 20 Vac	13 mA @ 20 Vdc
28 mA @ 24 Vac	16 mA @ 24 Vdc
44 mA @ 35 Vac	25 mA @ 35 Vdc


#### Coil Voltage Input:

24 Vac/dc; 50-60 Hz  
 Drop Out = 3 Vac / 3.8 Vdc  
 Pull In = 20 Vac / 20 Vdc

#### Notes:

» Must cut appropriate jumper to select Normally Open or Normally Closed

**# Relays & Contact Type:** One (1) SPST Continuous Duty Coil  
**Expected Relay Life:** 10 million cycles minimum mechanical  
**Operating Temperature:** -30 to 140° F  
**Operate Time:** 6mS  
**Relay Status:** LED On = Activated  
**Dimensions:** 1.250" x 2.750" x 1.750"  
**Track Mount:** 2.750", See MT212 Series on page 127  
 MT212 Mounting Track Sold Separately  
**Approvals:** UL Listed, UL916, UL864, C-UL Canada  
 California State Fire Marshal, CE Approved  
**Gold Flash:** No  
**Override Switch:** Yes

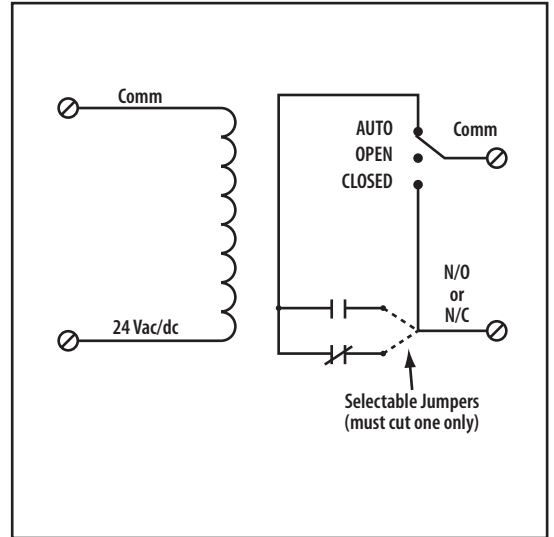

## Notes: