



Functional Devices, Inc.
 310 South Union Street
 Russiaville, IN 46979
 www.functionaldevices.com

Office: (765) 883-5538
 Sales: (800) 888-5538
 Fax: (765) 883-7505
 Email: sales@functionaldevices.com
 Manufacturing quality products in the United States of America since 1969

RIBXF


Enclosed Internal Fixed 0.50-30 Amp Current Sensor



Functional Devices, Inc. A600C 2005




Operating Temperature: -30 to 140 ° F
Dimensions: 4.00" x 4.00" x 1.80"
 with .50" NPT Nipple
Wire Length: 16", 600V Rated
Approvals: UL Listed, UL916, UL864, C-UL Canada
 California State Fire Marshal, CE Approved
Housing Rating: Plenum, NEMA 1
Sensor Type: Internal, with contact status
Sensor Threshold: Fixed, .5 Amps
Sensor Range: .50-30 Amps
Sensor Output: Solid State Contact 30 Vac/dc, 0.4 Amp
Max Sense Voltage: 600 Vac

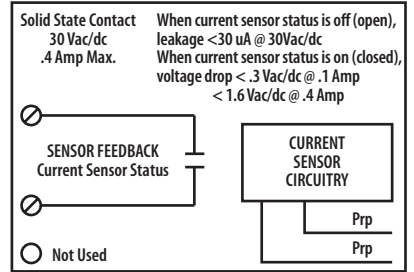

Notes:

INTERLOCKING LOADS (NO TRANSFORMER)

Self-powered Current Sensors of the RIBX Series and relays of the Dry Contact Input RIB Series may be applied to interlock Load 2 to Load 1.

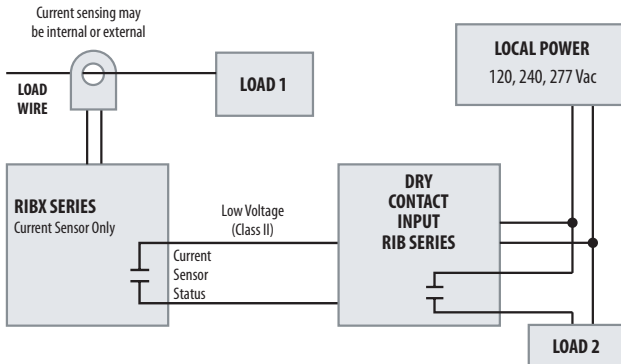

DRY CONTACT INPUT RELAYS

- RIB21CDC
- RIB01BDC
- RIB01SBDC
- RIB02BDC
- RIB02SBDC
- RIBM01ZND
- RIBM02ZND
- RIBM013PND

CURRENT SENSORS

- RIBXKF
- RIBXKTF
- RIBXKA
- RIBXKTA
- RIBXGA
- RIBXGF
- RIBXGTA
- RIBXGTF
- RIBXGFL
- RIBXGTF
- RIBXGFL
- RIBXF
- RIBXA
- RIBXV