

TR75VA004


Transformer 75 VA, 480/240/208/120 to 24 Vac, Circuit Breaker, Foot and Single Threaded Hub and Side Opening




Functional Devices, Inc. A600C 2005




VA Rating: 75
Frequency: 50/60 Hz
Mounting: Foot & Single Threaded Hub
Over Current Protection: Circuit Breaker
Dimensions: 3.000" x 2.500" x 3.900"
(w/ .500" NPT Hub)
Wire Length: 9.5" Typical w/ .5" Strip
Operating Temperature: -30 to 140° F
MTBF: 100,000 Hours @ 77° F
Construction: Split-Bobbin
Weight: 3.78 lbs.
Approvals: Class II UL1585 Listed, US / Canada
CE Approved

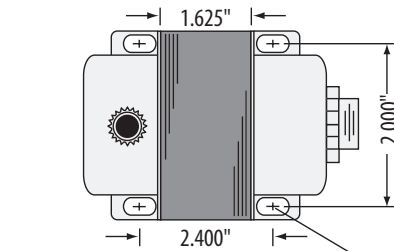

Mounting Hole = .350" x .175"

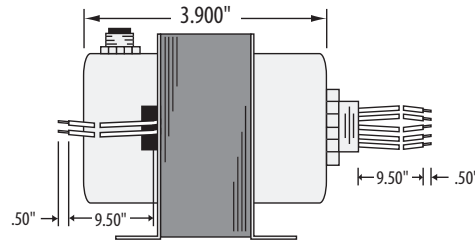

PRIMARY WIRES	SECONDARY WIRES
Gry - 480 Vac	Yel/Wht - 24 Vac
Org - 240 Vac	
Red - 208 Vac	
Wht - 120 Vac	
Blk - Comm	Yel - Comm



Notes: