



Functional Devices, Inc.
 310 South Union Street
 Russiaville, IN 46979
 www.functionaldevices.com

Office: (765) 883-5538
 Sales: (800) 888-5538
 Fax: (765) 883-7505
 Email: sales@functionaldevices.com

Manufacturing quality products in the United States of America since 1969


TR50VA016

Transformer 50 VA, 240/208/120 to 24 Vac, Circuit Breaker, Foot and Single Threaded Hub Mount





Functional Devices, Inc. A600C 2005

- VA Rating:** 50
- Frequency:** 50/60 Hz
- Mounting:** Foot & Single Threaded Hubs
- Over Current Protection:** Circuit Breaker
- Dimensions:** 3.060" x 2.525" x 3.475"
(w/ .500" NPT Hubs)
- Wire Length:** 9.5" Typical w/ .5" Strip
- Operating Temperature:** -30 to 140° F
- MTBF:** 100,000 Hours @ 77° F
- Construction:** Split-Bobbin
- Weight:** 2.90 lbs.
- Approvals:** Class II UL1585 Listed, US / Canada
CE Approved



| PRIMARY WIRES | SECONDARY WIRES |
|---------------|------------------|
| Org - 240 Vac | Yel/Wht - 24 Vac |
| Red - 208 Vac | |
| Wht - 120 Vac | |
| Blk - Comm | Yel - Comm |

Mounting Hole = .350" x .175"

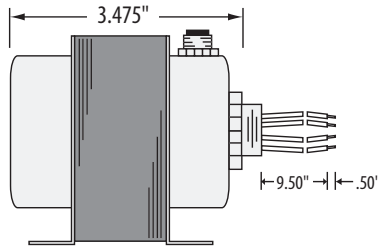

Notes: